

Bevpure

Formula B50

Max Hydraulic Pressure	10 Bar / 150 Psi
Temperature Range	-20 to 60 °C
Tensile Strength	17.5 MPa
Specific Gravity	0.885 ± 0.02



Main Applications


- Transfer of beer, soft drinks, potable water and juices
- Visual monitoring of fluid flow
- Low pressure transfer of solids and gases
- Very low out gassing - will not impart odour or taste to fluids
- Where high flexibility and tight bend radii are required

Features

- Taste tested to confirm "no taint" to carried fluids
- High flexibility
- Very resilient to impact and kink
- Resistant to a wide range of chemicals
- FDA approved
- Phthalate and BPA free

Product Code	ID (mm)	Tolerance (mm)	Nominal OD (mm)	Standard Coil (m)
B50-04	4.00	+0.05 / -0.10	9.00	30
B50-06	6.00	+0.05 / -0.10	9.00	30
B50-08	8.00	+0.05 / -0.10	13.00	30
B50-10	10.00	+0.05 / -0.10	15.20	30
B50-12	12.70	+0.05 / -0.10	18.00	30

Material Properties Quick Reference

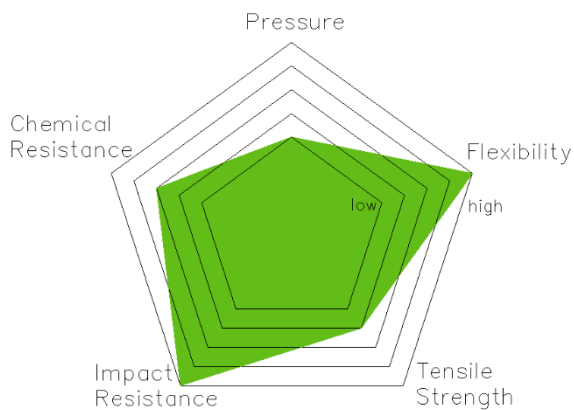

Colour Range

Natural